


Sifoanele de pardoseală cu sistem de închidere a nivelului apei sunt proiectate pentru instalații interioare. Sunt fabricate în două opțiuni, cu grilă de plastic sau din oțel inoxidabil.

Fabricate din PP, PS și oțel inoxidabil DIN 1.4301. Capacitate de încărcare K3 (300 kg). Rezistență la temperatură până la 90 ° C. Testat în conformitate cu EN 1253.

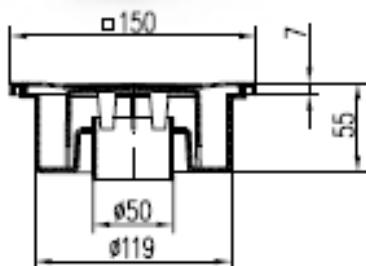


Sifon cu ieșirea orizontală DN50/55, plastic/INOX

Cod	Descriere	Grilă	Debit (l/min)	Greutate (kg/buc)
0111090	DN 50/55 P	Plastic	42	0,21
0111091	DN 50/55 N	INOX	40	0,36



grilă din inox 1,5 mm

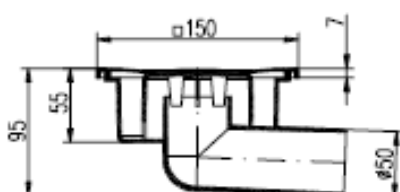

Sifon cu ieșirea laterală DN50/95, plastic/INOX

Cod	Descriere	Grilă	Debit [l/min]	Greutate (kg/buc)
0111093	DN 50/95 P	Plastic	44	0,25
0111094	DN 50/95 N	Inox	42	0,43




grilă din inox 1,5 mm

The floor drain with a water level closing system is designed for indoor installations. It is manufactured in three options, with a plastic grid white/black, and with a stainless steel surface. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.



Floor drain, bottom outlet DN110, plastic/stainless steel

Part number	Name	Packaging [pcs/pallet]	Flow rate [l/min]	Weight [kg/pcs]	Colour
323 P	DNS 110 P	9/432	45	0,31	■
323 Pb	DNS 110 P b	9/432	45	0,30	■
323 N	DNS 110 N	9/432	41	0,49	■

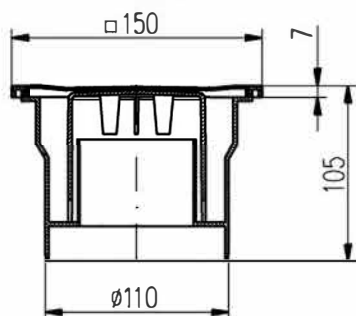


stainless steel grid 1,5 mm



Floor drain, side outlet DN50/95, plastic/stainless steel

Part number	Name	Packaging [pcs/pallet]	Flow rate [l/min]	Weight [kg/pcs]
326 P	DN 50/95 P	12/576	44	0,25
326 N	DN 50/95 N	12/576	42	0,43

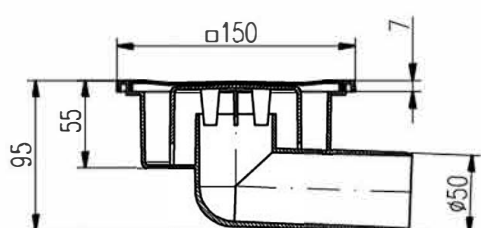

stainless steel grid 1,5 mm